

# PowerTech™ PWL 4045HFG04 Diesel Engine

Generator Drive Engine Specifications



JOHN DEERE



4045HFG04 shown


## Certifications

CARB

EPA Tier 4

EU Stage IV

## Engine dimensions

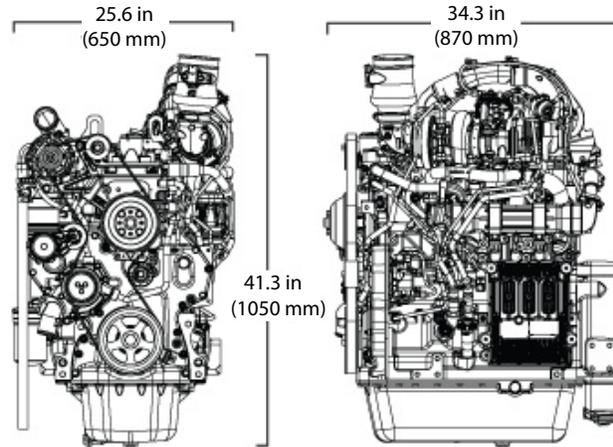

4045HFG09 shown

Dimensions may vary according to options selected. Call your distributor for more information.

## General data

Model	4045HFG04	Length – mm (in) to rear of block	870 (34.3)
Number of cylinders	4	Width – mm (in)	650 (25.6)
Displacement – L (cu in)	4.5 (275)	Height – mm (in)	1050 (41.3)
Bore and Stroke – mm (in)	106 x 127 (4.2 x 5.0)	Weight, dry – kg (lb)	550 (1213)
Engine Type	In-line, 4-cycle		
Aspiration	Turbocharged and air-to-air aftercooled		

## Performance data range

Rated speed	Engine power				Generator efficiency	Rated fan power		Power factor	Calculated generator set output			
	Prime		Standby			kW	hp		Prime		Standby	
Hz (rpm)	kW	hp	kW	hp	%					kWe*	kVA	kWe
60 (1800)	63–90	84–121	68–99	91–133	90	4.8–6.9	6.4–9.3	0.8	52–75	66–93	57–83	71–104

**Prime power** is the nominal power an engine is capable of delivering with a variable load for an unlimited number of hours per year. This rating conforms to ISO3046 and SAE J1995.

**Standby power** as defined in ISO 8528-1 is the maximum engine power available at varying load factors for up to 200 hours per year. This rating conforms to ISO 3046 and SAE J1995. The calculated generator set rating range for standby applications is based on minimum engine power (nominal -5 percent) to provide 100 percent meet-or-exceed performance for assembled standby generator sets.

\*Electrical power is calculated from the typical generator efficiency and fan power percentages shown. Applications may vary.

## Exhaust filter dimensions

Size	2
Diameter – mm (in)	260.71 (10.26)
Length – mm (in)	572.59 (22.54)
Weight – kg (lb)	19.96 (44)

See your John Deere Power Systems engine distributor for more information on available filter size options.

## SCR catalyst dimensions

Size	3
Diameter – mm (in)	322.58 (12.7)
Length – mm (in)	673.1 (26.5)
Weight – kg (lb)	34.02 (75)

## Features and benefits

### Wastegated turbocharger

- Wastegated turbochargers are designed to develop more air flow at lower engine speeds to improve low speed torque. The wastegate control device bleeds off a portion of the exhaust flow at higher engine speeds. Wastegated turbos deliver improved transient response and higher peak torque without compromising engine envelope size. They also provide the lowest installed cost across a given power range.

### Cooled exhaust gas recirculation (EGR)

- EGR cools and mixes measured amounts of cooled exhaust gas with incoming fresh air to lower peak combustion temperatures, thereby reducing NOx.

### Diesel oxidation catalyst (DOC)

- PowerTech PWL 4.5L engines for Final Tier 4/Stage IV produce near-zero levels of particulate matter (PM) without a filter thanks to an optimized combustion system and engine calibration. Remaining PM and other hydrocarbons are oxidized passively in a flow-through DOC without the need for regeneration.

### Selective catalytic reduction (SCR)

- John Deere engines feature an SCR system that utilizes a urea-based additive, sometimes referred to as diesel exhaust fluid (DEF). The ammonia in the urea mixes with engine exhaust gases in the SCR catalyst to reduce NOx — converting it to nitrogen and water vapor.

### High-pressure common-rail (HPCR) and engine control unit (ECU)

- The HPCR fuel system provides variable common-rail pressure, multiple injections, and higher injection pressures up to 2,500 bar (36,000 psi). It also controls fuel injection timing and provides precise control for the start, duration, and end of injection.

### 4-valve cylinder head

- The 4-valve cylinder head provides excellent airflow resulting in greater low-speed torque and better transient response time by utilizing a cross-flow design and a U-flow design.

### Air-to-air aftercooled

- This is the most efficient method of cooling intake air to help reduce engine emissions while maintaining low-speed torque, transient response time, and peak torque. It enables an engine to meet emissions regulations with better fuel economy and the lowest installed costs.

### Compact size

- Lower installed cost
- Mounting points are the same as previous engine models

### John Deere electronic engine controls

- Faster engine control unit (ECU) manages both the engine and the exhaust filter
- Four times the memory, twice the RAM and double the processing speed
- The input/output capability has increased 40%
- Premium software option integrates with equipment or vehicles to reduce engineering and installation costs

### Additional features

- Glow plugs
- Gear-driven auxiliary drive
- 500 hour oil change
- Self adjusting poly-vee fan drive
- Optional factory installed variable speed fan drive improves fuel economy and reduces noise levels
- RH and LH engine mounted fuel filters
- Replaceable (wet) cylinder liners
- Low pressure fuel system with electrical transfer pump and “auto prime” feature

**John Deere Power Systems**  
3801 W. Ridgeway Ave.  
PO Box 5100  
Waterloo, IA 50704-5100  
Phone: 800.553.6446  
Fax: 319.292.5075

**John Deere Power Systems**  
**Usine de Saran**  
La Foulonnerie - B.P. 11.13  
45401 Fleury les Aubrais Cedex  
France  
Phone: 33.2.38.82.61.19  
Fax: 33.2.38.82.60.00

*All values at rated speed and power with standard options unless otherwise noted. Specifications and design subject to change without notice.*